




Blocking and order sorting filters are frequently used in measuring equipment to suppress unwanted wavelengths. These filters have long wave pass characteristics and are supplied in 3mm thick standard holders.

TYPICAL PERFORMANCE

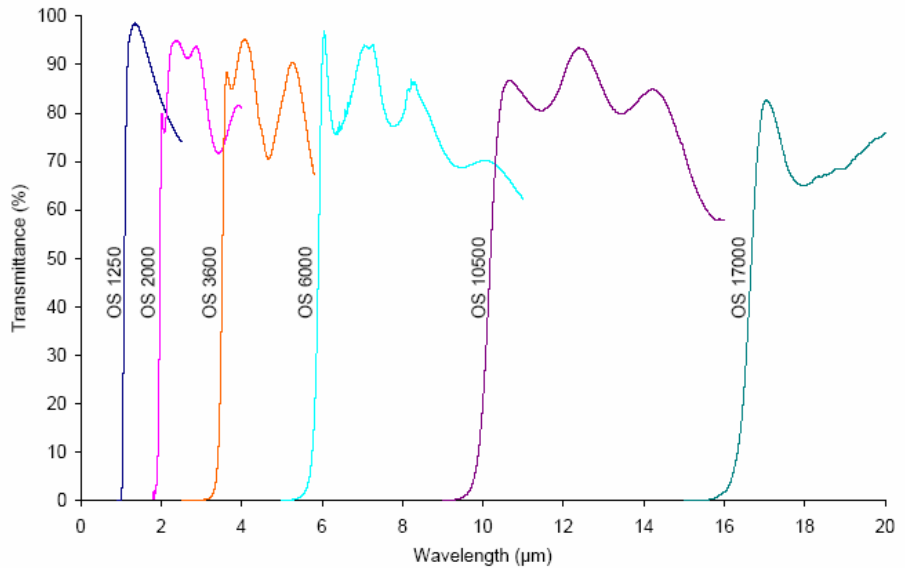

Email: sales@noc-ltd.com

Tel: +44 (0) 191 5374888

Fax: +44 (0) 191 5374777

TYPICAL CHARACTERISTICS

Lower wavelengths fully blocked

Mounted in standard holders

Diameter: 25mm (nominal)

Thickness: 3mm (nominal)

Clear aperture 21mm (nominal)

Discounts available for larger quantities.

Alternative wavelengths available on request.

**Northumbria Optical
Coatings Limited**

10 Burford Way,
Baldon Business Park,
Baldon,
Tyne and Wear,
NE35 9PZ,
United Kingdom.

Part	Tx (5%) edge position	Tpeak (min)	Tx (ave)	Range
OS1250	1.04μm	90%	> 70%	1.25 to 2.00μm
OS2000	1.90μm	80%	> 70%	2.00 to 4.00μm
OS3600	3.32μm	80%	> 70%	3.60 to 6.50μm
OS6000	5.55μm	80%	> 70%	6.00 to 10.5μm
OS10500	9.75μm	80%	> 60%	10.50 to 18.00μm
OS17000	16.20μm	80%	> 60%	17.00 to 22.00μm

